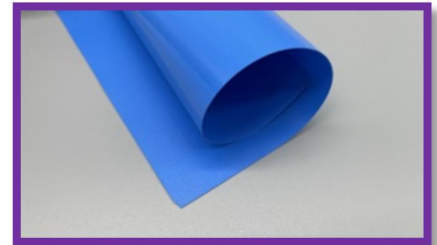
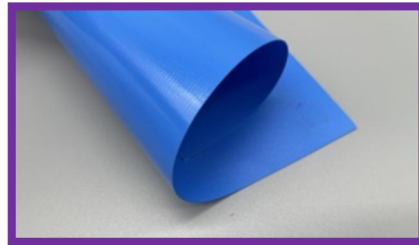
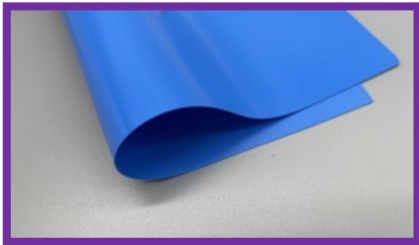


PVC TARPAULIN FOR INFLATABLE FABRIC 840D*840D 18*18 562GSM**Features**

- A variety of color choices are available
- Excellent tensile strength, tear resistance, extremely soft hand feeling
- Waterproof, flame retardant, Anti-UV, Anti-Bacterial, Anti-Mildew, Oil resistant
- Strong and durable, not easy to wear

Product Overview**Technical Data Sheet**

Item Code		PTIFVM562	Test Method
Base Fabric		840D*840D 18*18	DIN EN ISO2060
Weight (GSM)		562	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1800	DIN53354
	Weft (N/5cm)	1800	DIN53354
Tear Strength	Warp (N/5cm)	350	DIN53363
	Weft (N/5cm)	350	DIN53363
Peeling Strength	Warp (N/5cm)	100	DIN53357
	Weft (N/5cm)	100	DIN53357
Temperature		-30°C/+70°C	
Flame Retardant		B1/M1/M2/NFPA701	
Lacquering (Optional)		Acrylic/ PVDF	
Special Treatment		Anti-Wicking/Anti-UV/Anti-Aging/Cold Resistant/Osmosis Prevention/Mildew Resistant	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat/WhatsApp: +86-15858322153
<mailto:contact@hncomax.com> <https://www.hncomax.com>

